




BRAUNKABEL

Passt. Einfach. Perfekt.

BKDATA

ETHERNET CAT. 5e 1 X 4 X 22/7 AWG

ECO FC

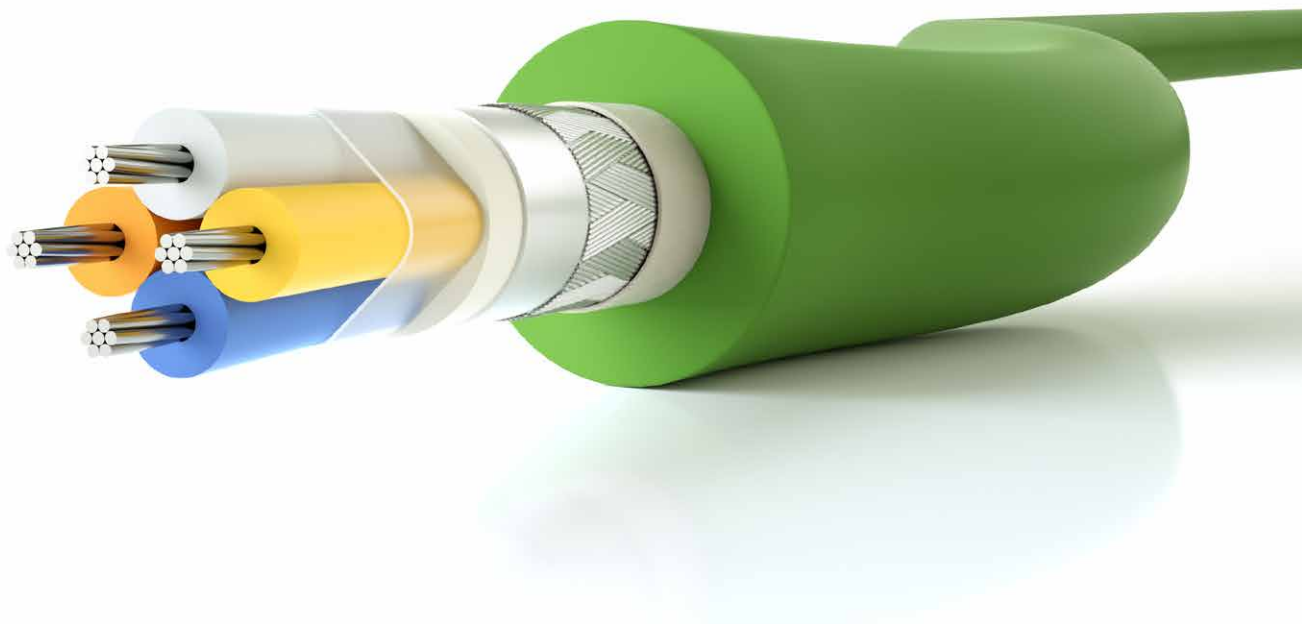

FLAME-RESISTANT

CMX

APPLICATIONS / PRODUCT FEATURES

- Cabling in accordance with EN 50173
- PROFINET® and Ethernet/IP
- Industrial Ethernet Category 5e with a transmission rate of up to 100 Mbit/s
- Meets the real-time requirements for Industry 4.0
- Suitable for flexible use and fixed installation
- Supports patch cable applications up to max. 80 metres
- PROFINET® core coding (with ring coding on request)
- Particularly suitable for food & beverage applications
- Halogen-free

BENEFITS OF BRAUNKABEL

- Direct from the manufacturer
- Excellent precision, dimensional accuracy and centricity, plus small tolerances
- Short delivery times / standard design available from stock
- Space-saving compact design with star quad configuration
- High UL approvals
- Fully recyclable outer sheath
- Also optimised for short lengths

**BKDATA****ETHERNET CAT. 5e 1 X 4 X 22/7 AWG
ECO FC**

CONSTRUCTION DETAILS	
Conductor	22/7 AWG tinned
Core insulation	Polypropylen
Stranding	Star-quad
Sequence of colour	According to PROFINET® Code: white, yellow, blue, orange (with ring coding on request)
Inner sheath	FRNC
Shield	Foil, copper braiding
Tape	Eparating tapes
Outer sheath	100% recyclable thermoplastic
Colour	Green, similar RAL 6018
Cable diameter	6.5 ± 0.2 mm

CHARACTERISTICS	
Flame retardant	According to UL 2556 VW 1
UL	CMX-Listing
Other guidelines	RoHS- and REACH-conform

MECHANICAL PROPERTIES	
Temperature UL range	fixed: -20° to +75° C moved: -20° to +75° C
Temperature out of UL	fixed: -25° to +90° C moved: -25° to +90° C
Min. bending radius	fixed: 4 x diameter moved: 8 x diameter

ELECTRICAL PROPERTIES	
Characteristic impedance	According to IEC 61156-6 (Nominal impedance 100 Ohm)
Conductor resistance	59 Ohm
Voltage	UL-Listing 300 Volt

TRANSMISSION PROPERTIES								
Frequency (MHz)	1*	4	10	16	20	31.25	62.5	100
Attenuation (dB/100m)	1.66	3.36	5.41	6.93	7.75	9.85	14.52	19.06
NEXT (dB)	73	74	75	64	63	63	64	60

* Just for information

CROSS SECTION

FORMAT / PACKAGING	
100 m ring	Order no. 503150
500 m on bobbin	Order no. 503151
1.000 m on bobbin	Order no. 503152

SUBJECT TO TECHNICAL MODIFICATIONS.

ALL THE LOGOS AND WORD MARKS USED ARE REGISTERED
TRADEMARKS**BRAUNKABEL GMBH** . Uferstraße 24-30 . D-73630 Remshalden
Phone: +49 7151 97934-0 . Fax: +49 7151 74662
info@braunkabel.de . www.braunkabel.de