




BRAUNKABEL

Passt. Einfach. Perfekt.

BKDATA

ETHERNET CAT. 5e 1 X 4 X 26/7 AWG

PUR

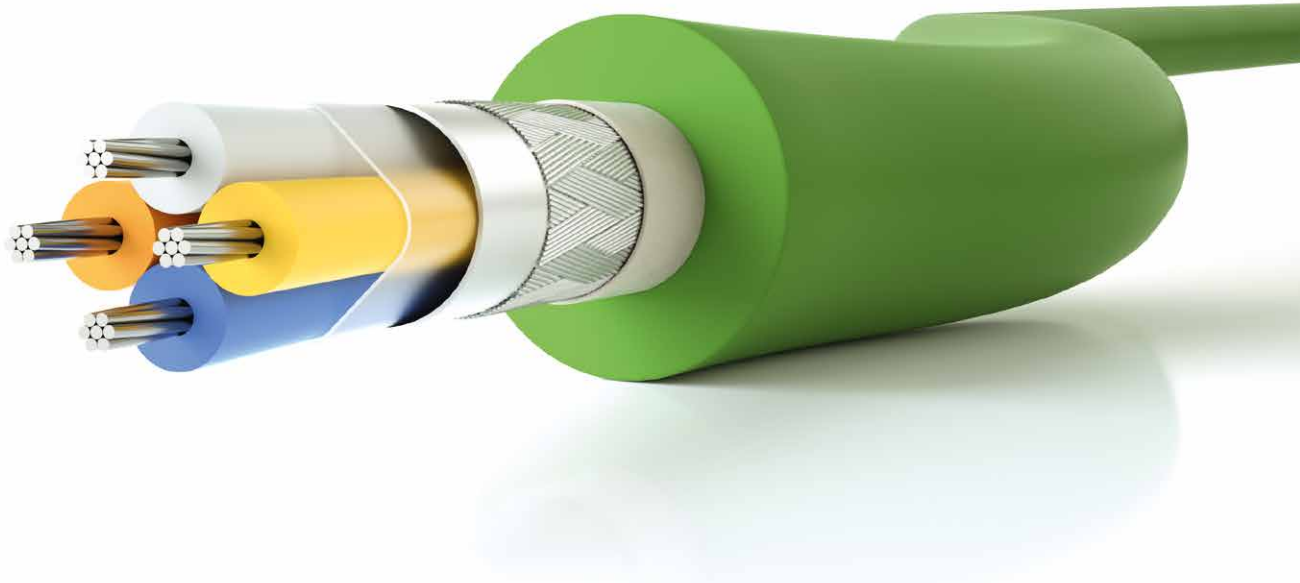

EtherCAT



FLAME-RESISTANT


CMX

APPLICATIONS / PRODUCT FEATURES

- Cabling in accordance with EN 50173
- PROFINET® and Ethernet/IP
- Industrial Ethernet Category 5e with a transmission rate of up to 100 Mbit/s
- Meets the real-time requirements for Industry 4.0
- Suitable for flexible use and fixed installation
- Supports patch cable applications up to max. 60 metres
- PROFINET® core coding
- Halogen-free
- Oil, microbe-, hydrolysis- and UV-resistant PUR

BENEFITS OF BRAUNKABEL

- Direct from the manufacturer
- Short delivery times / standard design available from stock
- Space-saving compact design with star quad configuration
- High UL approvals
- Also optimised for short lengths

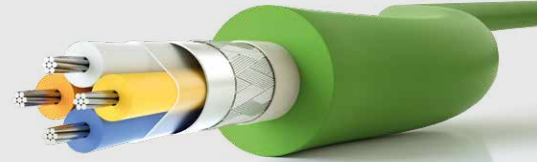**BKDATA****ETHERNET CAT. 5e 1 X 4 X 26/7 AWG
PUR****CONSTRUCTION DETAILS**

Conductor	26/7 AWG tinned
Core insulation	Polypropylen
Stranding	Star-quad
Sequence of colour	According to PROFINET® Code: white, yellow, blue, orange
Shield	Foil, copper braiding
Tape	Eparating tapes
Outer sheath	PUR
Colour	Green, similar RAL 6018
Cable diameter	5.2 ± 0.15 mm

CHARACTERISTICS

Flame retardant	According to UL 2556 VW 1 (CSA FT 1)
UL	CMX-Listing
Other guidelines	RoHS- and REACH-conform

MECHANICAL PROPERTIES

Temperature UL range	fixed: -20° to +75° C moved: -20° to +75° C
Temperature out of UL	fixed: -50° to +90° C moved: -50° to +90° C
Min. bending radius	fixed: 4 x diameter moved: 8 x diameter

ELECTRICAL PROPERTIES

Characteristic impedance	According to IEC 61156-6 (Nominal impedance 100 Ohm)
Conductor resistance	142 Ohm
Voltage	UL-Listing 300 Volt

TRANSMISSION PROPERTIES

Frequency (MHz)	1*	4	10	16	20	31,25	62,5	100
Attenuation (dB/100m)	2,79	5,49	8,35	10,37	11,46	14,18	20,30	26,27
NEXT (dB)	75	74	64	68	58	61	53	52

* Just for information

CROSS SECTION**FORMAT / PACKAGING**

100 m ring	Order no. 502873
500 m on bobbin	Order no. 502874
1.000 m on bobbin	Order no. 502875

SUBJECT TO TECHNICAL MODIFICATIONS.

ALL THE LOGOS AND WORD MARKS USED ARE REGISTERED
TRADEMARKS**BRAUNKABEL GMBH** . Uferstraße 24-30 . D-73630 Remshalden
Phone: +49 7151 97934-0 . Fax: +49 7151 74662
info@braunkabel.de . www.braunkabel.de